



## PRODUCT SPECIFICATION

8/10/2020



6438100116583

Enclosure PC

DPCP081209G.U

Code DPCP081209G.U  
 GTIN 6438100116583  
 Name Enclosure PC Ensto Cubo D  
 Size 80 x 120 x 86 mm, plain sides, grey cover, PC

Description Ensto Cubo D is a series of small enclosures with plain sides. Special features include fastening pods inside the cover and slots for printed circuit boards in the base.

Vendor



## Technical specification

### Others

Content: Enclosure base, cover, cover screws, mounting screws, cover plugs for cover screws

ETIM Class: EC000261

### Material

Base: Polycarbonate

Cover: Polycarbonate

Cover screws: Stainless steel

Gasket: Polyurethane

### Colors

Color: Grey

### Certificates

Standards: EN 62208, UL 508A

UL File no.: E189312

### US specific

Depth inch: 3.39 in

[www.ShamrockControls.com](http://www.ShamrockControls.com)  
 13735 Beta Rd., Dallas TX 75244  
 972.233.6712 fax 972.233.8039

Environmental type:	4, 4x, 6, 12, 13
Height inch:	4.72 in
Inner depth inch:	2.83 in
Operating temperature °F:	-40 ... 176 °F
Outer base depth inch:	2.8 in
Outer cover height inch:	0.59 in
Short term temperature range °F:	-40 ... 248 °F
Size inch:	3.15 x 4.72 x 3.39 in
Weight pound:	0.54 lb
Width inch:	3.15 in

### Technical information

Material:	Polycarbonate
-----------	---------------

### Ratings

Degree of protection:	IP66/IP67
Flammability rating:	UL 746C 5 inch flame test

### Dimensions

Depth:	86 mm
Height:	120 mm
Inner depth:	72 mm
Net Weight:	0.205 kg
Outer base depth:	71 mm
Outer cover height:	15 mm
Size:	80 x 120 x 86 mm
Volume :	82.56 cm <sup>3</sup>
Width:	80 mm

### Mechanical

Impact strength:	IK 08
------------------	-------

### Temperatures


Operating temperature:	-40 ... 80 °C
Short term temperature range:	-40 ... 120 °C

## ETIM 7

### Etim

Colour:	Grey
Degree of protection (IP):	IP67
Depth:	86 mm
EMC-version:	False
Floor installation possible:	False
Height:	120 mm
Impact strength:	IK08
Material:	Plastic

Material quality:	Other
Mounting plate depth-adjustable:	False
Pitched roof:	False
Pole fastening:	False
RAL-number:	7035
Suitable for outdoor set-up:	True
Surface nishing:	Untreated
Tackable:	False
Wall build in:	False
Wall fastening possible:	True
With backside door:	False
With glazed door:	False
With mounting plate:	False
With ventilation door:	False

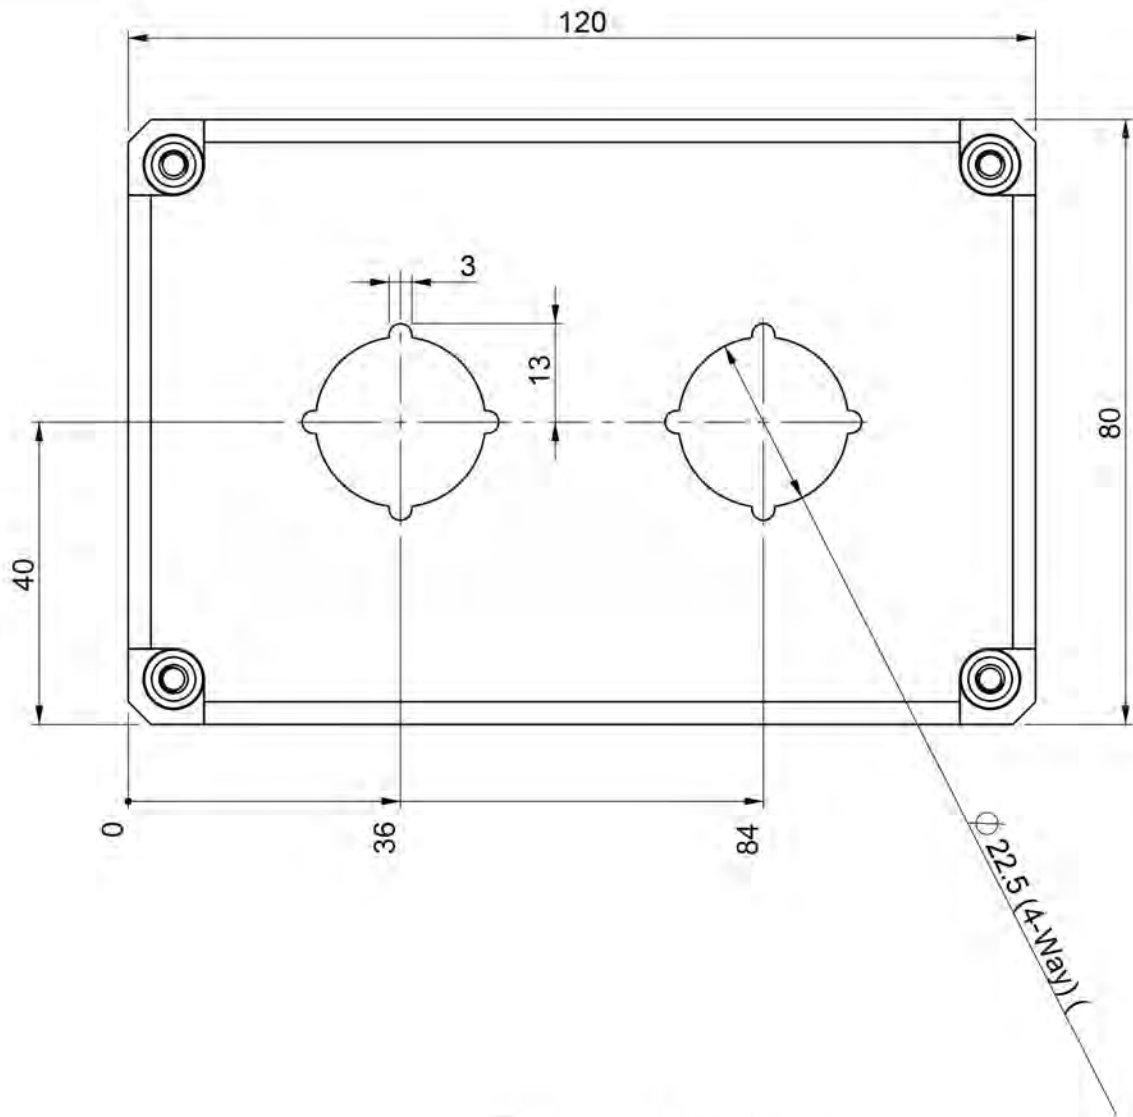

[www.ShamrockControls.com](http://www.ShamrockControls.com)  
 13735 Beta Rd., Dallas TX 75244  
 972.233.6712 fax 972.233.8039